
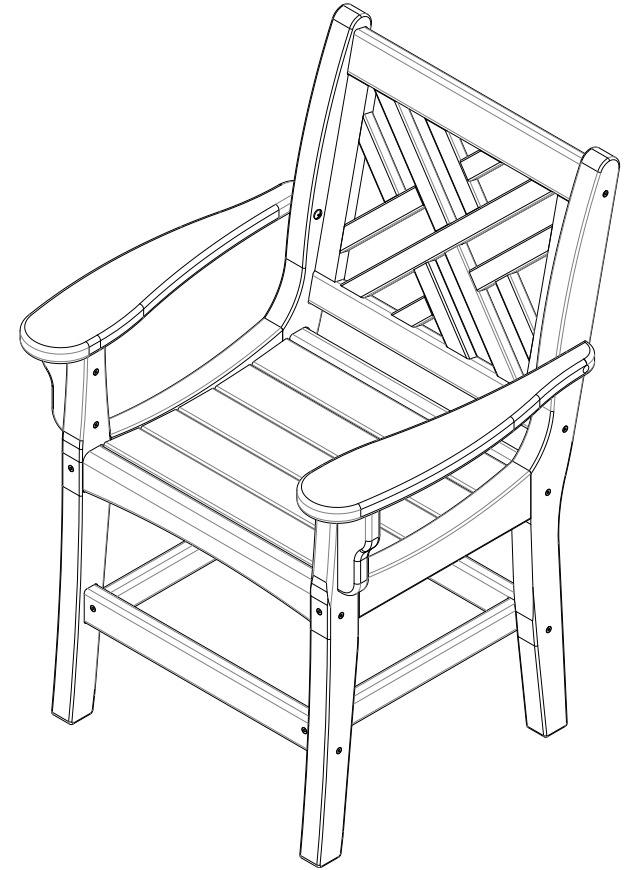


# VANITY BACK DINING CHAIR & VANITY BACK DINING CHAIR W/ARMS INSTRUCTIONS

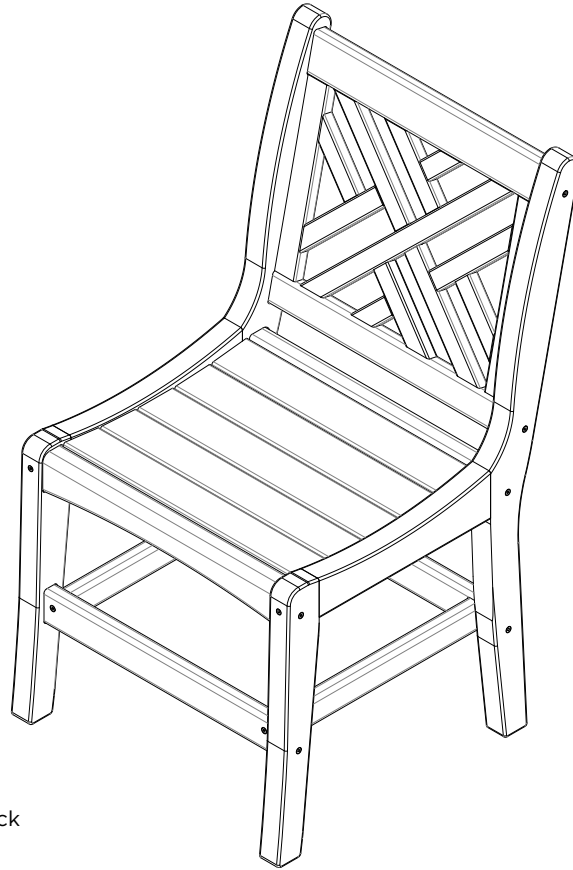

**NOTE:**  
Instructions cover Chippendale Back and Cross Back  
Dining Chairs  
Chippendale Back is shown  
Assembly and hardware are identical

## CHAIR PARTS



- LEFT LEG ASSEMBLY
- RIGHT LEG ASSEMBLY
- BACK ASSEMBLY
- SEAT ASSEMBLY
- LOWER FRAME

## SUGGESTED TOOLS

- RUBBER Mallet
- PHILLIPS HEAD SCREWDRIVER
- DRILL

## HARDWARE PACK


Hardware Pack Weight: 3.23 oz.




## ASSEMBLY

**STEP 1.** Use (6) 3" screws to attach the Seat Assembly, Lower Frame, and the Back Assembly to the Left Leg Assembly.

**NOTE:** Make sure Lower Frame screws are towards the seat to prevent screws from intersecting.

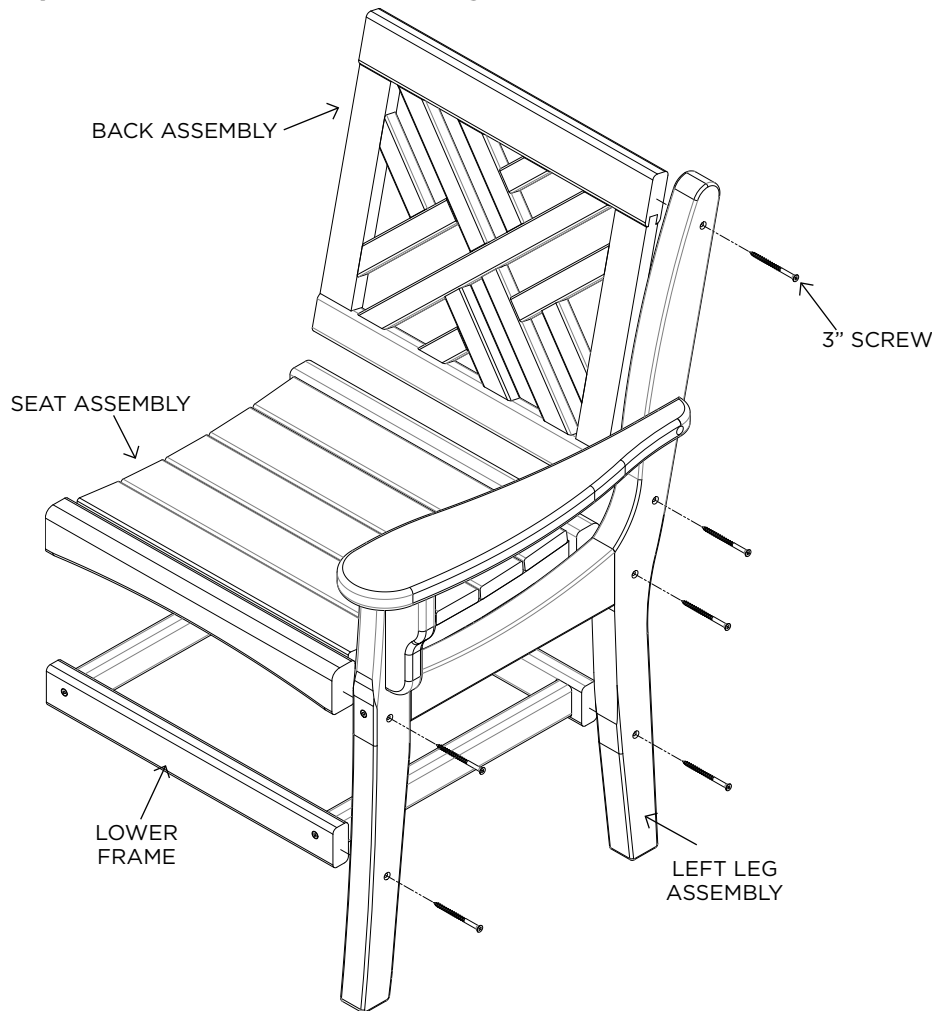

**STEP 2.** Use (6) 3" screws to attach the Right Leg Assembly to the Seat Assembly, Lower Frame, and Back Assembly.

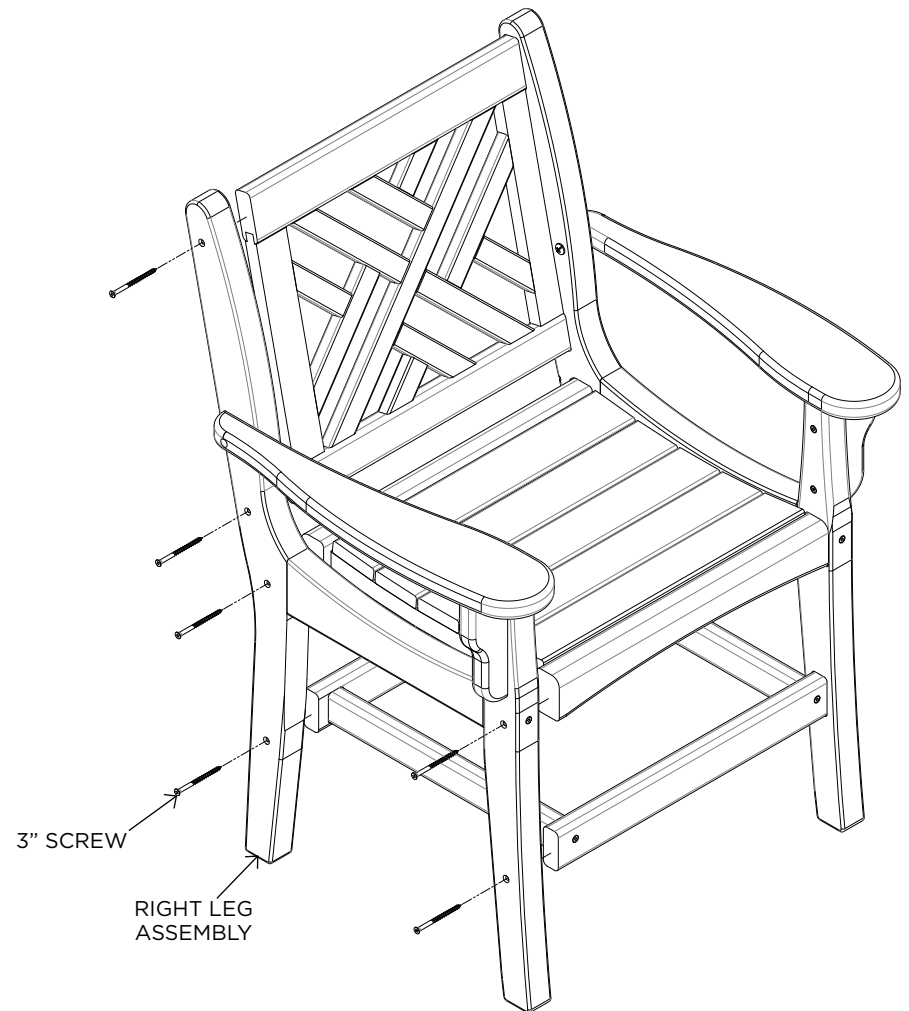

Congratulations on purchasing this Durawood Vanity Back Dining Chair or Vanity Back Dining Chair w/Arms. QUESTIONS REGARDING THIS PRODUCT? Call our customer service team, 252-758-0641.

**RESIDENTIAL WARRANTY** - This quality product includes a LIMITED LIFETIME WARRANTY for RESIDENTIAL CUSTOMERS. In the unlikely event any splintering, rotting, cracking, peeling, or chipping should ever occur, The Hammock Source will supply replacement parts or replace the furniture, at no charge to you. This does not include negligence, improper use, animal damage or damage caused by natural disasters. When using around fire, keep furniture at a minimum distance of 30 inches from the heat source. Prevent prolonged exposure to chlorinated water. Note that an original sales receipt must accompany any returned product, along with a Return Authorization Number from Hammock Source customer service; call toll-free at 252-758-0641.

**CONTRACTOR WARRANTY** - CONTRACTORS receive a LIMITED 7-YEAR WARRANTY. Follow the same steps outlined above.

**MAINTENANCE** - Thoroughly inspect product before each use. Periodically check bolts after assembly and re-tighten when necessary.

