



# Single Rope Swing

Congratulations on your purchase. You now have one of Nags Head Hammocks' innovative products! If you have any questions regarding this product, we invite you to call us 7 days a week at 800-344-6433.

Helpful tips before starting: • Get someone to help you. Some pieces are heavy and a second pair of hands always helps. • Do not tighten the bolts completely until the product is fully assembled. Some pieces are harder to fit in place and this will help. A hammer or rubber mallet is needed during assembly. • Do not over-tighten the bolts or screws. • Build your item close to where it will be used to eliminate difficulty in moving once completed. • For a uniform look, face all nuts in the same direction.



Step 1. Set Rollup on flat surface such as a work table. Align holes of Left Arm with holes located on the side of the Rollup. FIGURE 1


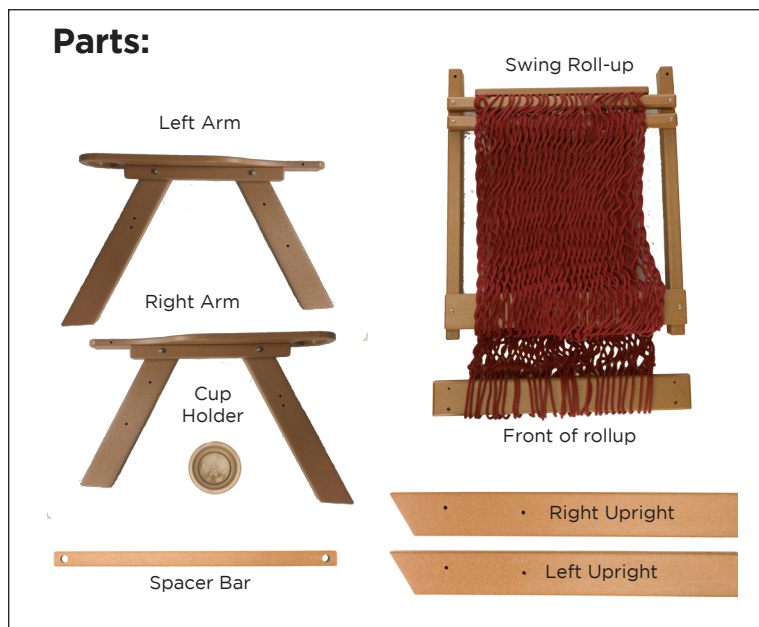


FIGURE 1

Step 2. Starting with back hole of Arm, thread 3.5" Bolt through Washer, through Arm and Rollup. Secure with Washer and Locknut. Repeat process for holes at front of Arm. Note: This step may require a Mallet to tap Bolts through. FIGURE 2

**Hardware**

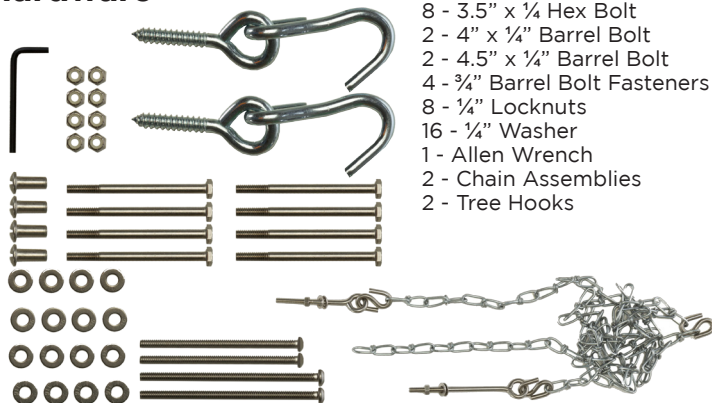

Step 3. Repeat Step 2 for Right Arm.



FIGURE 2



**SUGGESTED TOOLS**  
(NOT PROVIDED)

- Rubber Mallet
- Standard Phillips Head Screwdriver
- Adjustable Wrench

Step 4. Locate Left Upright and place on rollup as shown. Thread 3.5" hex bolt through washer, Left Arm, Left Upright. Secure loosely with washer and Locknut. FIGURE 3



Step 5. Rotate Left Upright to align with top hole in Left Arm. Thread 4" Barrel Bolt through hole. Secure loosely with Barrel Bolt Fastener. FIGURE 4

Step 6. Repeat Steps 4-5 for Right Side.

Step 7. Place a 4.5" Barrel in both bottom holes of Rollup and seed into bottom holes of Uprights. Secure with Barrel Bolt Fasteners. FIGURE 5



Step 8. Using shortest length of chain assembly, thread bolt through Washer, through upper left hole in Rollup and Upright. Secure using washer and Locknut. FIGURE 6

Step 9. Repeat Step 8 for right side.



Step 10. Tip swing onto back and using longest length of chain assembly, thread bolt through Washer, through left hole at front of Rollup. Secure using washer and Locknut. FIGURE 7



Step 11. After returning Swing to upright position, locate the Spacer Bar and thread through holes in remaining chain assembly. FIGURE 8

Step 12. Insert Cup Holder. FIGURE 9

Step 13. Tighten all bolts securely.

Step 14. Hang swing after properly securing with included tree hooks (Spaced approximately 25" - 30" apart), or from your existing hooks.

Step 15. Enjoy your new Nags Head Hammocks Swing.



*Care Instruction and Tips: Great care has been put into manufacturing this item. However, it is made of high density resin and some natural esthetic imperfections and dark spots are normal and should be expected. You can wash the wood and the rope using a hose and some bleach water. You can also brush the wood to help remove dirt. \*These instructions are also available at [www.nagsheadhammocks.com/assembly\\_instructions.asp](http://www.nagsheadhammocks.com/assembly_instructions.asp) Warranty: Products of Nags Head Hammocks are guaranteed to be free of defects in workmanship or material. We will replace defective parts for free. Simply call us and we will see that you get what you need. Prolonged exposure to weather conditions including snow, rain, and humidity are not covered under the warranty nor is damage caused by normal wear, mildew, improper care including storage, maintenance, and assembly. Returns: Nags Head Hammocks has a money back guarantee. If you are not satisfied with an item, return it unused in its original packaging for a complete merchandise refund or exchange. You can return it to any store or to our warehouse, Nags Head Hammocks, 305 Industrial Bd., Greenville, NC 27834. Please include a copy of your receipt and your contact information. Nags Head Hammocks, PO Box 533, Nags Head, NC 27959*