


FOLDING DOUBLE ROCKER



HAMMOCKS

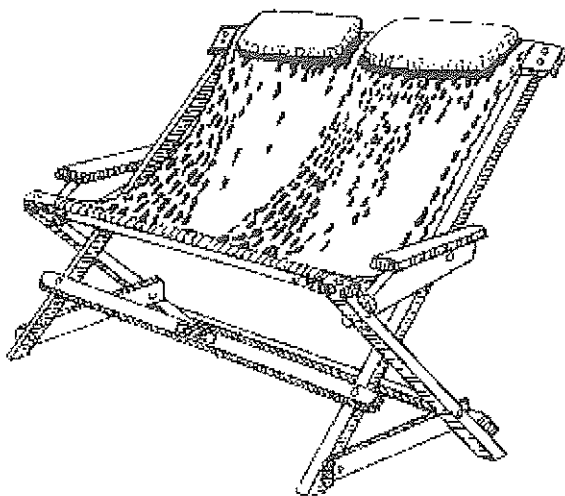

Congratulations! You now own a Folding Double Rope Rocker that was handcrafted in North Carolina by Nags Head Hammocks. Our unique lever action type of double rocker offers a variety of comfortable seating positions. After assembly it folds for easy storage. We hope you will enjoy many years of comfort.


NAGS HEAD HAMMOCKS

P.O. Box 533 • Nags Head, NC 27959


1-800-344-6433 • 252-441-6115

www.nagshead.com

CHAIR PARTS INCLUDED

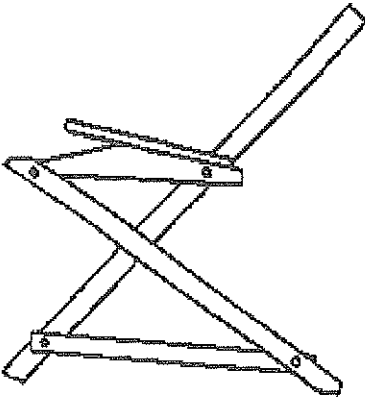


TWO OUTSIDE LEG ASSEMBLIES




ONE 48" BRANDED CROSS SUPPORT



TWO 48" CROSS SUPPORT

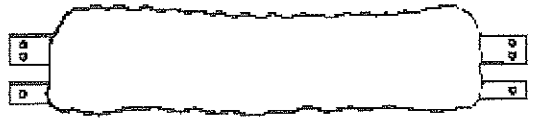


ONE SEAT ROLL-UP




TEN 3" CARRIAGE BOLTS



TWELVE LOCKNUTS



TWO 2 3/4" CARRIAGE BOLTS



TWELVE WASHERS

HARDWARE INCLUDED

TOOLS NEEDED

Two 7/16" Wrenches (2 pliers will suffice)

One Mallet or Light Hammer

HELPFUL HINTS:

- Lay out chair outside leg assemblies on a flat clean surface.
- Sort and identify all parts.
- Holes may need to be cleared of hardened varnish to ease assembly.
- Do not tighten all hardware until fully assembled.

ASSEMBLY:

STEP ONE: (See Diagram)

Place the chair outside leg assemblies about 48" apart from each other facing the same direction. Attach the 48" branded cross support to the front of the bottom hole on the 45" leg. (Hardware sequence is 3" carriage bolt through the branded cross support then through the leg with a washer and nut attached last.)

STEP TWO: (See Diagram)


Attach the 48" cross support to the topside of the bottom hole on the 33" leg at the back of the chair. (Hardware sequence is 3" carriage bolt through the cross support then through the leg with a washer and nut attached last.)

STEP THREE: (See Diagram)

Attach the other 48" cross support to topside of the second hole back of the 33" leg at the front of the chair. (Hardware sequence is 3" carriage bolt through the cross support then through the leg with a washer and nut attached last.)

STEP FOUR: (See Diagram)

Unroll the seat roll-up. Attach the thinner 48" bar running through the rope body to the

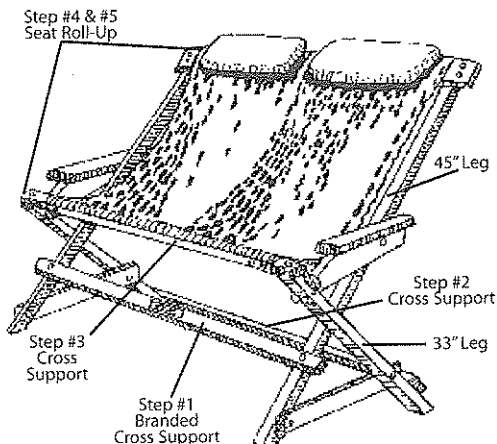

topside of the first hole on the 33" leg at the front of the chair. (Hardware sequence is 2 $\frac{3}{4}$ " carriage bolt through the cross support then through the leg with a washer and nut attached last.)

STEP FIVE: (See Diagram)

Attach the wider 48" bar running through the rope body to the front of the top two holes on the 45" leg at the back of the chair. (Hardware sequence is 3" carriage bolt through the cross support then through the leg with a washer and nut attached last.)

STEP SIX:

Tighten all nuts.

AVOID OVERTIGHTENING ON INITIAL ASSEMBLY & CHECK PERIODICALLY

MAINTENANCE:

The rope seat is washable. Leave it on the frame and use a soft brush, liquid detergent and a garden hose. The pillow is also washable. Remove the foam, use a mild detergent and cold water, air dry. We recommend storing your chair out of the weather in the winter. This will prolong the life of the finish, hardware and overall appearance. Store in a dry and rodent free area. Excessive sunlight and moisture will affect the finish on the oak frame. To maintain a nice finish, periodically recoat the frame with a high quality polyurethane. Hint: Simply remove the retaining strips located behind the woven seat and slide the rope over to one side allowing you to apply finish. After the finish has dried, slide rope to other side of frame and repeat. When completed, rearrange the ropes evenly across frame and replace the wood strips.

Thank you and enjoy!

PLEASE CALL 1-800-344-6433 Ext. 2
MONDAY-FRIDAY
FOR ASSISTANCE WITH ASSEMBLY.